


# Woodlyn® SMM Slit Lamp

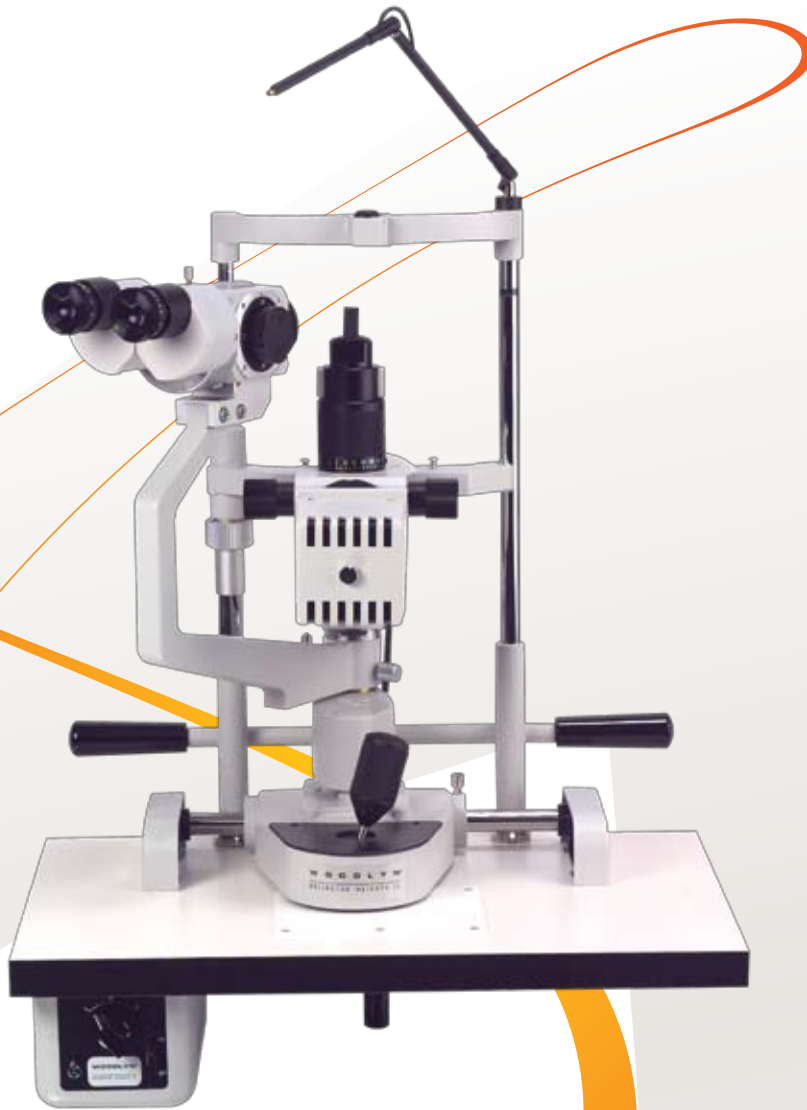

The Woodlyn SMM5 Slit Lamp provides the practitioner with all the features required to perform a complete slit lamp examination. Some of these features include outstanding image contrast and depth of field, a bright rotative slit image, and a wide field of view. Its versatility provides for a variety of photo attachments allowing the doctor photographic and teaching capabilities.

The Woodlyn SMM3 Slit Lamp Offers high end quality at an affordable price. It features a true parallel to converging optical system microscope for maximum depth of focus. The SMM3's rotating magnification drum allows for rapid selection of 10X, 16X, and 25X. Additional features include a Universal joystick which controls X, Y and Z movements. An Aperture Disc with cobalt blue, red-free, and slit height sizes of 12mm, 10mm, 6.5mm, .3mm. A rotatable slit with an axis scale. Continuous slit width adjustment from 0 to 12mm.

## SPECIFICATIONS

### Microscope

SMM5:  
6X, 10X, 16X, 25X, and 40X magnification changes.  
Working Distance: 98mm  
Eyepiece Focus Adjustment: +5D, -6D  
P.D. Adjustment: 48 - 78mm  
Gross Weight: 43.5 lbs Net Weight: 35 lbs

SMM3:  
10X, 16X, and 25X magnification changes.  
Working Distance: 103mm  
Eyepiece Focus Adjustment: +/-7D  
P.D. Adjustment: 52.5mm to 77.5mm  
Gross Weight: 43 lbs Net Weight: 34.5 lbs

### Illumination System

SMM3 & 5:  
Slit Length:  
0.3, 6.5, 10, and 12mm  
Slit Width:  
Continuously variable from 0 to 12mm  
Slit Rotation:  
0 to 180 (with angle indicating scale)  
Filters:  
Cobalt Blue, Red - Free and Diffuser  
Lamp:  
6V, 20W Halogen, prefocused

### Options/Accessories

SMM3 & 5:

- Applanation Tonometer B70
- Beam Splitter & Teaching Tube with
- Image Rotation.
- Measuring Eyepiece
- Cameras, Video, 35mm & Polaroid
- Camera Mounts
- Any slit lamp diagnostic lens
- Motorized Table